

Set Up Sheet



ver.1.00

Name

Jared Tebo

Date

January 15 2012

Track / City

The RC Factory/ Jeffersonville, OH

Event

2012 CRCRC MidWest Champs

Front Suspension

Upper Spacer 0 mm

Ackerman Spacer 0 mm

Bumpsteer Spacer 0 mm

Camber -1 °

Toe In Out 1 °

Pivot Spacer 0.5 1.0 None

Caster 25° 30°

Caster Block Spacing: Forward Middle Back

Axle Height Up Down

Comments:

Rear Suspension

Hub Spacer 2 mm

Wing Height 1 2 3 4

Upper Spacer 1 mm

Anti-Squat 0 °

Sway Bar None mm

Hub Toe 0°(Standard) 0.5°(Optional)

Wheelbase Short Middle Long

Comments:

Comments: Hubs spaced 4mm in front of hub and 2mm behind hub. Used forward outside hole location **UMW516-1**.

Shocks

	Front	Rear
Piston	<u>BB 5-Hole</u>	<u>BB 5-Hole</u>
Oil Weight	<u>40</u>	<u>35</u>
Spring	<u>BB Yellow</u>	<u>BB Red</u>
Limiters	<u>0 Turns</u>	<u>2.5 Turns</u>
Shock Length	<u>28.2</u> mm	<u>33.2</u> mm

Shock length from bottom of shock body to the top of shock end.


Body / Wing / Chassis

Body Proline Chevy

Wing

Wing Angle 4° 7° 10°

Battery Placement* Front Rear

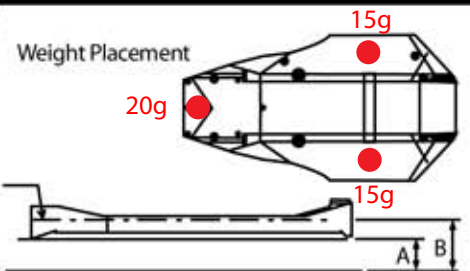

Ride Height A B F 31 mm R 29 mm

Tires

	Front	Rear
Tire	<u>AKA Grid Iron</u>	<u>AKA Wishbones</u>
Inserts	<u>AKA Black</u>	<u>AKA Black</u>
Wheel	<u>AKA</u>	<u>AKA</u>
Traction Compound	<u>None</u>	<u> </u>

Power System

Motor Team Orion 6.5

Battery Team Orion 5000 90c

ESC Team Orion R10

Pinion / Spur 17 / 82

Differential: Ball Gear

Track Conditions

- | | | |
|---|---|--|
| <input type="checkbox"/> Smooth | <input type="checkbox"/> Wet | <input type="checkbox"/> Blue Groove |
| <input checked="" type="checkbox"/> Bumpy | <input checked="" type="checkbox"/> Dry | <input checked="" type="checkbox"/> Clay |
| <input type="checkbox"/> Low Traction | <input type="checkbox"/> Sandy | <input type="checkbox"/> Dusty |
| <input checked="" type="checkbox"/> Med. Traction | <input type="checkbox"/> Soft Dirt | <input type="checkbox"/> Other |
| <input type="checkbox"/> High Traction | <input type="checkbox"/> Grass | <u> </u> |

Comments: **Jared Tebo's 2012 CRCRC Winning Set Up!**

A 5mm shim is used under rear suspension mount.