



Name \_\_\_\_\_ Date \_\_\_\_\_ Truck / City \_\_\_\_\_ Event \_\_\_\_\_

### Front Suspension:

#### Shock Position:




#### Upper Arm Position:



4.8mm Ball Stud:  
 97050M(Std)  
 UM129

Upper Spacer: \_\_\_\_\_ mm

Camber \_\_\_\_\_ °

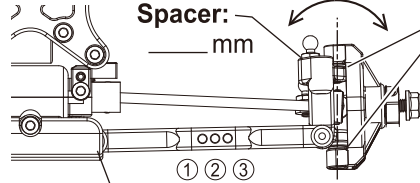

Shock Position: \_\_\_\_\_


Axle-Height Spacer:

Up  
 Down

Caster Block:

7°  
 10°


Bump Steer Spacer: \_\_\_\_\_ mm



Toe:  
 In  
 Out \_\_\_\_\_ °

Sway Bar:  
 None  
 \_\_\_\_\_ mm

Ackerman Spacer: \_\_\_\_\_ mm



#### Lower Sus Holder Block:

Front \_\_\_\_\_ Rear \_\_\_\_\_

#### Lower Sus Holder Spacer:

Front \_\_\_\_\_ mm Rear \_\_\_\_\_ mm

Comments: \_\_\_\_\_

### Front Diff:


Gear Diff. # \_\_\_\_\_  
 Ball Diff. \_\_\_\_\_

### Rear Suspension:

#### Shock Position:



#### Upper Arm Position:




4.8mm Ball Stud:  
 97050M(Std)  
 UM129

Upper Spacer: \_\_\_\_\_ mm

Camber \_\_\_\_\_ °


#### Sus. Arm:

LA272(Std)  
 UM713

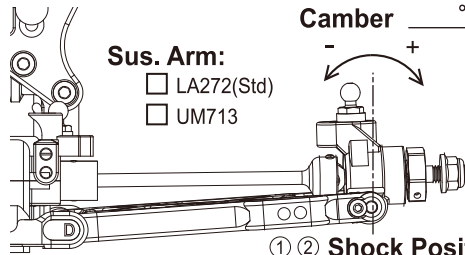

Shock Position: \_\_\_\_\_

#### Hub Carrier:



Upper Spacer: \_\_\_\_\_ mm

0°Type-B(UM519)  
 0°Type-B2(UM519-2)  
 0°Alu(UMW704-0)  
 0.5°Alu(UMW704-05)  
 1°Alu(UMW704-1)

#### Sway Bar:

None  
 \_\_\_\_\_ mm

#### Lower Sus Holder Block:


Front \_\_\_\_\_ Rear \_\_\_\_\_

#### Lower Sus Holder Spacer:

Front \_\_\_\_\_ mm Rear \_\_\_\_\_ mm

Comments: \_\_\_\_\_

Toe In: \_\_\_\_\_ °



#### Wheelbase:

Front: \_\_\_\_\_ mm

Rear: \_\_\_\_\_ mm

### Slipper Type:

Separates  
 Direct

### Rear Diff:

Gear Diff. # \_\_\_\_\_  
 Ball Diff. \_\_\_\_\_

### Shock:

Front

Rear

Shock Piston: \_\_\_\_\_

Shock Oil: # \_\_\_\_\_ # \_\_\_\_\_

Shock Spring: \_\_\_\_\_

Limiters:

in out mm mm

in out mm mm

Shock Length(A): \_\_\_\_\_ mm


\_\_\_\_\_ mm

Shock Top Type:  Alu(UM719/Std)  UM753-1

5.8mm Ball End:


Front:  S  M  L

Rear:  S  M  L



### Chassis:

#### Ride Height:

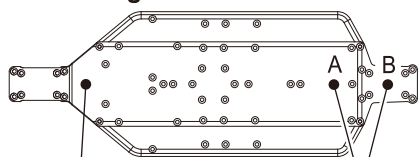

Front \_\_\_\_\_ mm

Rear  A  B \_\_\_\_\_ mm

### Tire:

Front

Rear

Tire: \_\_\_\_\_

Inserts: \_\_\_\_\_

Wheel: \_\_\_\_\_

Traction Compound: \_\_\_\_\_

Comment: \_\_\_\_\_

### Electronics:

Battery:  Saddle Pack  
 Short

Motor Position:  Front  
 Rear

Servo Mounting:  Straight  
 Sideways

Motor: \_\_\_\_\_

Motor Timing: \_\_\_\_\_

Pinion/Spur: \_\_\_\_\_

ESC: \_\_\_\_\_

Radio: \_\_\_\_\_

Servo: \_\_\_\_\_

### Body / Wing:

Body: \_\_\_\_\_

Wing Mount:

Narrow  Wide

Wing Dum Height: \_\_\_\_\_ mm

Wing: \_\_\_\_\_

Wing Angle:

4°  7°  10°

Lip Height: \_\_\_\_\_ mm

### Material:

Screw:  Steel  Titanium

Pinion Gear:  Steel  Aluminium

Shock O-Ring:  O-ring  X-ring  Red  Clear