


LAZER ZX6 SET UP SHEET



Name ELLIOTT BOOTS Date 1.11.2014 Truck / City PARIS Event CML MASTERS

Front Suspension:

Shock Position:



Lower Sus Holder Block:

Front B Rear B

Lower Sus Holder Spacer:

Front 0 mm Rear 1 mm

Comments:

Upper Arm Position:



4.8mm Ball Stud:

- 97050M(Std)
 UM129

Upper Spacer: _____ mm

Camber 0°

Bump Steer Spacer:

0 mm

Toe:


- In
 Out 1°

Sway Bar:

- None
 1.3 mm

Ackerman Spacer:

0 mm

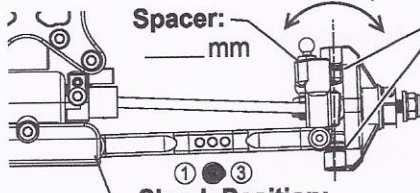

Spacer: _____ mm

Axle-Height Spacer:

- Up
 Down

Caster Block:

- 7°
 10°

Wheelbase:

Front 0 mm

Rear 1 mm

Front Diff:

- Gear Diff. # _____
 Ball Diff. _____

Rear Suspension:

Shock Position:



Lower Sus Holder Block:

Front D Rear C

Lower Sus Holder Spacer:

Front 4 mm Rear 2 mm

Comments: RUPE BITS SPINE WEIGHT / SAMES

Upper Arm Position:



4.8mm Ball Stud:

- 97050M(Std)
 UM129

Upper Spacer: 2 mm

Sus. Arm:

- LA272(Std)
 UM713

Camber 2°

Hub Carrier:


- Type-B (UM519)
 Type-B2 (UM519-2)

Upper Spacer: 2 mm

- 0°Type-B(UM519)
 0°Type-B2(UM519-2)
 0°Alu(UMW704-0)
 0.5°Alu(UMW704-05)
 1°Alu(UMW704-1)

Sway Bar:

- None
 1.2 mm

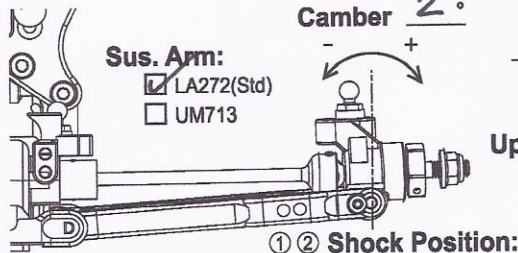

Shock Position:

Wheelbase:

Front: 2 mm

Rear: 0 mm

Slipper Type:

- Separates
 Direct

Rear Diff:

- Gear Diff. # _____
 Ball Diff. _____

Shock:

Front

Rear

Shock Piston: 1.6x2

1.7x2

Shock Oil: # 55

35

Shock Spring: ORANGE

GOLD

Limiters: _____

Shock Length(A): 21 mm

28 mm

Shock Top Type: Alu(UM719/Std) UM753-1

5.8mm Ball End:

Front: S M L

Rear: S M L


M L

M L



Chassis:

Ride Height:

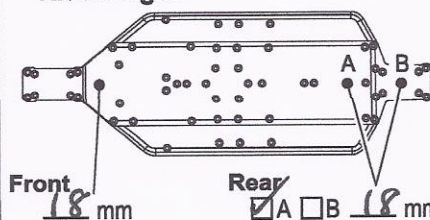

Front 18 mm

Rear A B 18 mm

Tire:

Front

Rear

Tire: _____

PIN PANT

Inserts: _____

SD

Wheel: _____

PROUNE

Traction Compound: _____

Comment: _____

Electronics:

- Battery: Saddle Pack
 Short

- Motor Position: Front
 Rear

- Servo Mounting: Straight
 Sideways

Motor: TEKIN 6.5

Motor Timing: 0

Pinion/Spur: 23/STD

ESC: TEKIN RSX

Radio: SANWA.

Servo: SANWA.

Body / Wing:

Body:

STD.

Wing Mount:

- Narrow Wide

Wing Dum Height:

_____ mm

Wing:

RUPE BITS

Wing Angle:

- 4° 7° 10°

Lip Height:

_____ mm

Material:

Screw: Steel Titanium

Pinion Gear: Steel Aluminium

Shock O-Ring: O-ring X-ring Red Clear