

Name _____ Date _____ Track / City _____ Event _____

Front Suspension

Upper Spacer: _____ mm
 Std Carbon
4.8mm Ball Stud:
 UM128(Std) UMW508(+2mm High Mount)
Camber: _____ °
 Forward(Std) Reverse
4.8mm Ball Stud:
 LA246 (-1mm Low Mount) 97050M (Std)
Ackerman Steer Spacer: _____ mm
Front Tower:
 Std Carbon
Toe: In Out _____ °
Tie Rod: _____
Front Bulkhead Weight Placement:
 None Bulkhead Inside _____ oz _____ g On the skid plate _____ oz _____ g * 1oz=28g
Caster:
 25° 30°
 A (UM502) B (UM721/Std.) C (UM567)
4.8mm Ball Stud Spacer: _____ mm
Spacer: 0.5 1.0 None
Caster Block: 0° 2° 4°
Front Arm: Std Carbon
Wheel Hub: _____ mm
Front Axle: UM569 (Std) UM506 (RB5)
Caster Block position: IN (wide/Std) OUT (Narrow)
Axle Spacer: Out _____ mm In _____ mm
Knuckle: Std Carbon
Bump Steer Spacer: _____ mm
Axle Height Spacer: _____ mm
Comments: _____
Wheelbase: F: _____ mm R: _____ mm

Rear Suspension

Rear Tower: Std Carbon
Sus Holder Spacer: F 0.5 1.0 None R 0.5 1.0 None
Anti-Squat: _____ °
Upper Spacer: _____ mm
Hub spacing: F: _____ mm R: _____ mm
Outer Bearing: 5X10 5X11 5X13
Wheelbase(arm): F: _____ mm R: _____ mm
RR: **4.8mm Ball Stud:** UM129 UMW508(+2 High mount) 97050M UM128(Std)
Upper Spacer: _____ mm
Lower Sus Holder: Normal Aluminum(Opt)
 RF UMW511+UMW512 RM UMW705/706
 Wide RF2 UMW514+UMW515 MM UMW705/707
Universal Swing Shaft: _____ mm
Camber: _____ °
Axle Spacer: Out _____ mm In _____ mm
Rear Arm: UM713(Std) UM521/566 UM521-1 UM503(Short) UMW711(Carbon)
Rear Hub Toe: 0° Type-B(UM519Std) 0° Type-B2(UM519-2) 0° Alu (UMW704-0) 0.5°Alu (UMW704-05) 1° Alu (UMW704-1)
Comments: _____
Motor Position: Rear Motor Midship Motor
Diff.: Gear Diff. # _____ Ball Diff.


Shock

Shock Piston: Front _____ Rear _____
Shock Oil: # _____ # _____
Shock Spring: _____
Limiters: in out mm in out mm mm
Shock Length(A): _____ mm _____ mm
Shock Length(B): _____ mm _____ mm
O-ring: _____
Ball End type: Front: S M L Rear: S M L
Shock Cap: UM719(Std) UM753-1(Bleeder)

Battery Placement:

UM787 None Screw

Comments: _____




Foam: Front Rear None

Battery Type

Straight Saddle Short
 Type: _____

Chassis

UM700(Std) UMW720(Lightweight)

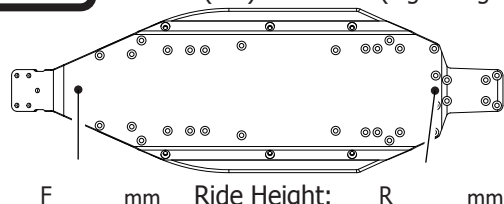

Other

Motor: _____
 ESC: _____
 Pinion/Spur: _____

Tire

Front _____ Rear _____ Traction Compound and/or comments: _____

Tire: _____

Inserts: _____

Wheel: _____

Comments: _____

Track Condition

- Smooth
- Bumpy
- Low Bite
- Med. Bite
- High Bite
- Wet
- Dry
- Sandy
- Soft Dirt
- Grass
- Blue Groove
- Clay
- Dusty
- Other

Body&Wing

- UMB03
- UMB03LW
- Wing Mount : Narrow Wide
- Wing Angle : 4° 7° 10°
- Blast-S
- Blast-L
- Step-S
- Step-M
- Step-L
- Step 2.0
- Lip : _____